



» Available with FDA approved plastic chain belting



Redefining "In Place Cleaning" o

» The Tension Release tail flips up to relieve tension on the belt simply by removing two pins, making it easy to remove the belt or clean underneath



» Conveyor designed for quiet operation for use in close proximity to workers



Watch the video to see how easily HC200 conveyors can be disassembled without tools **qcconveyors.com/hydroclean/video**

Tool-less drive removal



Tool-less tail removal



Unique Pull Pin Design •


Every HC200 conveyor can be fully disassembled without tools to aid your facility's in place cleaning efforts. Additionally, they feature a sanitary design meant to minimize opportunities for bacteria to accumulate.



Clean, Efficient Conveying

V-Guided Belts

- » V-Guide helps to ensure positive tracking in most environments or applications
- » Available belts include accumulation, anti-microbial and totally encapsulated options




NSF & BISSC Certified


- » Minimal mated surfaces that can be easily disassembled for cleaning
- » Slotted frame and soft angles promote drainage








- » Stainless steel, sealed ball bearings support high speeds up to 300 FPM
- » Stainless steel cover protects bearings during cleaning



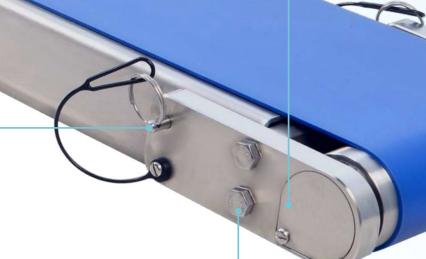

Hex Head Fasteners •

» Hex head fasteners with no exposed threads where bacteria could accumulate

Specifications

- » Widths: 4", 6", 8", 10", 12", 18", 24"
- » Lengths: 42" to 18'
- » Load Capacity: 120 lbs
- » Profile: 2.34"
- » Speeds: to 300 FPM
- » All stainless steel construction

24/7 Online Quoting

Configure and quote conveyors 24 hours a day using our online Conveyor Configurator. An intelligent assistant uses engineer-developed rules to make sure all your components — including gearmotors, stands, and sides/guides — work together properly.



Fast, intelligent online configuration and quoting



Fast, Intelligent, Online ————

- » Manage multiple conveyors in a single quote using separate bills of materials
- » Our algorithms identify errors and offer options for making corrections
- » Register your conveyor to qualify for our 10 Year Warranty
- » Access appropriate manuals and videos by serial number to make maintenance easy
- » View past orders and quote replacement parts directly from the original bills of materials, complete with exploded views to help you find exactly the right part

Download 3D CAD Models -

Once you've designed a conveyor with the Conveyor Configurator, you can download all the 3D CAD models, exploded views and specifications in one package to make integration with your application easy. We've included sides/guides, drives, stands and automation accessories, so it's easy to drop the complete conveyor system directly into your application.



10 Year Limited Warranty -

Our products are developed and tested with long-term reliability in mind. To ensure our conveyors will run problem-free in the field for many years, we demand the tightest tolerances in the industry and manufacture our components using the most advanced processes available. Each conveyor is inspected at several points of the manufacturing process to ensure quality, including a final operational test before it leaves our facility. That's why we confidently stand behind our products with a 10 year warranty when they're registered at qcconveyors.com/serial.



Belts

HydroClean Series conveyors feature v-guided belts for positive tracking in most applications.

Belt Choices

	Ordering Code	Surface Description	Surface Material	FDA	BISSC & NSF*	Anti- microbial	Anti- Static	Topside Coefficient of Friction	Short Term Part Max Temp. (°F)	Max Ambient Operating Temp. (°F)	Average Belt Thickness (inches)
Multi-Purpose —											
	PVD	Smooth	Urethane	✓			✓	Low	176	176	0.050
	MVA	Smooth	Urethane	✓			✓	Low	176	176	0.059
	MVE	Smooth	Urethane	✓			✓	Medium	176	176	0.060
	UVE	Smooth	Urethane	✓		✓	✓	High	176	176	0.050
Sealed Edge —											
	PVF	Smooth, Sealed Edge	Urethane	✓	✓		✓	Low	176	176	0.050
	MVG	Smooth, Sealed Edge	Urethane	✓	✓		✓	Medium	176	176	0.060
	MVB	Smooth, Sealed Edge	Urethane	✓	✓		✓	Low	212	176	0.071
Totally Encapsulated ————————————————————————————————————											
	KVA	Smooth, Sealed Edge	Polyurethane	✓	✓	✓	✓	Low	176	176	0.070
	KVB	Smooth, Sealed Edge	Polyurethane	✓	✓	✓		Low	176	176	0.060
Accumulation —											
	AVA	Fabric	Urethane	✓			✓	Very Low	158	158	0.043


More belt options available at qcconfig.com

*Meets NSF standards

Cleats

Cleats are high frequency welded to the MVE white urethane belt

Cleat tolerance may vary, please contact the factory if cleat accuracy is critical.



Plastic Chain

Flush Grid Belts

Material: Polypropylene
General Purpose belt; low coefficient
of friction for accumulation
applications; economical

Flat Top Belts

Material: Antimicrobial Polyethylene Cold application belt with antimicrobial additive; open hinge design for easy cleaning





Stands, Mounts, and Sides



Stainless Steel Stands

Stainless steel stands offer an open design for ease of cleaning. Pull-pin attachment makes belt removal easy. Stainless steel leveling feet (L) included; casters (C) optional. Flip down angle braces (included) enhance stability and remove easily with pull pins for belt changes.

Part # HE1-0184-HH-WW-L

Outrigger Stands Part # HE1-0185-HH-WW-C/L


Aluminum Stands

Extruded aluminum stands offer exceptional value for applications where stainless steel isn't necessary. Pull-pin attachment makes belt removal easy. Painted steel leveling feet (L) included; casters (C) optional.

Part # HE1-0180-HH-WW-C/L



» Stand brackets flip out of the way for easy belt removal





Watch the video to see how easily HC200 conveyors can be disassembled without tools at qcconveyors.com/hydroclean/video

Adjustable Guides

Adjustable Guides are designed to guide the product being conveyed. The rails adjust vertically and horizontally, offering the ultimate in flexibility. Guides can be removed without tools for cleaning and belt changes.

Part # HE1-0281-LLL-T (Built to NSF specifications)

Fixed Sides

Ideal for containing product on the belt. Sides can be removed without tools for cleaning and belt changes. Built to NSF specifications.

1" Sides Part # HE1-0174-LLL 2" Sides

1" Sides with Wearstrip Part # HE1-0178-LLL

2" Sides with Wearstrip Part # HE1-0216-LLL

1" Indented Sides Part # HE1-0219-LLL

2" Indented Sides

Part # HE1-0215-LLL

Part # HE1-0218-LLL

Universal Mounts

Designed to attach conveyor to tabletop or other machinery. Can be positioned at any point along the conveyor frame.

3.5" Top of belt Part # HE1-0181-04 5" Top of belt Part # HE1-0182-04





Drive Packages



Bottom Drive

- » Belt is highest point of conveyor
- » Supports speeds up to 300 FPM and loads to 120 lbs

Side Drive

- » Motor sits to the side of the conveyor
- » Supports speeds up to 300 FPM and loads to 120 lbs

Washdown Standard Duty Gearmotors

- » Available in AC, Fixed Speed*
- » Available in 115v Single Phase, 230v Single Phase, or 230v Three Phase
- » IP67 rating
- * 230v Three Phase motor can be variable speed when used with an AC inverter



Standard/Heavy Duty Gearmotors

- » Available in DC, Variable Speed
- » Available in 115v Single Phase, 230v Single Phase, or 230v Three Phase
- » IP65 rated gearmotor
- » Includes Controller and 3m cables with IP20 connectors



Washdown 56C Heavy Duty Gearmotors

- » Available in AC or DC, Fixed or Variable Speed
- » Available for the following power sources:

115v/230v AC Single Phase 230v/460v AC Three Phase 230v/460v AC Three Phase Inverter Duty 90v DC



Learn More

Additional Products Available from QC Conveyors

In addition to our easy-to-clean HydroClean Series conveyors, we offer a variety of other products. Automation Series conveyors are built on a rigid aluminum frame with features designed for ease of use. Our Industrial Series includes IS125 conveyors built for heavier loads, IS175-ID conveyors with an embedded drive, and IS300 conveyors which feature a timing belt with accuracy to ±.015". Please visit our website or contact your local distributor for more information.



qcconveyors.com

QC Conveyors' website qcconveyors.com - is your resource for the most up-todate information about all our products.



Conveyor Configurator

Configure & quote conveyors online, 24 hours a day. See page 4 for more information.



Your Local Distributor

Contact our sales department today at (513) 753-6000 to find your local distributor.



ACAT MEXICANA S.A. DE C.V.

Avenida Regio Parque #200, Regio Parque Industrial, Apodaca N.L. C.P. 66633



www.acatmexicana.com



acat@acatmexicana.com



TEL. 81 83548910



(513) 753-6000 | qcconveyors.com | Part # MKTG-HC-0119

